



Juno® Trac-Lites™ System

A complete and customizable track system with an array of features

juno®

Juno[®] Trac-Lites[™] System



Track sections are constructed of extruded aluminum and offer a low 1/2" profile that unobtrusively hugs the ceiling. Attractive yet affordable, they incorporate all the popular Juno Trac features, including debossed polarity indicators for fast, sure alignment. Standard track sections are available in 2', 4', 6' and 8' lengths with 12-gauge copper conductors. They can be easily cut to custom lengths in the field. A comprehensive selection of electrical feeds and connectors completes this highly versatile system.

Track Sections & Electrical Feeds


Track Sections



Features

- Low 1/2" profile fits snugly to ceiling
- Rigid extruded aluminum channel
- Standard solid 12-gauge copper conductors
- 20 Amp capacity
- Debossed polarity line provides visual alignment with fixture and connector polarity arrows
- One circuit only
- Dead end and mounting hardware included
- Can be cut to custom length by installer

Catalog #	Finish	Description
R 2FT WH	White	2' One-Circuit Track
R 2FT BL	Black	(19-7/8" actual length)
R 2FT SL	Silver	
R 2FT BZ	Bronze	
R 4FT WH	White	4' One-Circuit Track
R 4FT BL	Black	(43-7/8" actual length)
R 4FT SL	Silver	
R 4FT BZ	Bronze	
R 6FT WH	White	6' One-Circuit Track
R 6FT BL	Black	(67-7/8" actual length)
R 6FT SL	Silver	
R 6FT BZ	Bronze	
R 8FT WH	White	8' One-Circuit Track
R 8FT BL	Black	(91-7/8" actual length)
R 8FT SL	Silver	
R 8FT BZ	Bronze	




Track Dead End



Track Dead Feed

Catalog #	Finish	Description
R28 WH	White	<ul style="list-style-type: none"> • Only required when terminating extra field cut-off sections • One supplied with track section
R28 BL	Black	
R28 SL	Silver	
R28 BZ	Bronze	




Electrical Feeds




End Feed Connector and Outlet Box Cover

Catalog #	Finish	Description
R21 WH	White	<ul style="list-style-type: none"> • For outlet box feed • Includes outlet box cover, fixture strap, and ground screw
R21 BL	Black	
R21 SL	Silver	
R21 BZ	Bronze	











End Feed Connector

Catalog #	Finish	Description
R38 WH	White	<ul style="list-style-type: none"> • Feeds track from above with Flex or BX • Accepts standard 1/2" electrical connector
R38 BL	Black	
R38 SL	Silver	
R38 BZ	Bronze	
R38 RP WH	White	<ul style="list-style-type: none"> • Same as above except designed for use in opposite polarity orientation compared to standard feed connectors • See specification sheets for more details
R38 RP BL	Black	



Electrical Feeds













Electrical Feeds (cont)

 <p>Conduit Feed</p>	Catalog #	Finish	Description	Dimensions
	R34 WH	White	• For surface wiring using standard 1/2" electrical connector	
	R34 BL	Black		
	R34 SL	Silver		
	R34 BZ	Bronze		
	R34 RP WH	White	• Same as above except designed for use in opposite polarity orientation compared to standard feeds	
	R34 RP BL	Black	• See specification sheets for more details	
 <p>T-Bar End Feed</p>	Catalog #	Finish	Description	Dimensions
	R36 WH	White	• Wiring compartment contains standard 1/2" K.O.'s	
	R36 BL	Black		
	R36 SL	Silver	• Feeds track from above when 15/16" T-bar is directly above track	
	R36 BZ	Bronze		
	R36 RP WH	White	• Same as above except designed for use in opposite polarity orientation compared to standard feeds	
			• See specification sheets for more details	
 <p>Floating Electrical Feed</p>	Catalog #	Finish	Description	Dimensions
	R29 WH	White	• Permits mounting at any point along track at outlet box	
	R29 BL	Black		
	R29 SL	Silver	• Includes floating connector, outlet box cover, and track dead end	
	R29 BZ	Bronze		
 <p>Cord and Plug Connector</p>	Catalog #	Finish	Description	Dimensions
	R22 WH	White	• 15' 2-wire white cord	
	R22 BL	Black		
	R22 SL	Silver	• Includes surface wire retainers and in-line switch	
	R22 BZ	Bronze	• 7 Amp maximum	
			• Not UL Rated	
	R122 WH	White	• Same as above but with three wires and matching color cords	
	R122 BL	Black		
	R122 SL	Silver	• No switch	
	R122 BZ	Bronze	• 7 Amp maximum	
			• Not UL Rated	

The product and system may be covered by the following United States patent: US 5,259,774



Connectors



Connectors



 Miniature Straight Connector	Catalog #	Finish	Description	Dimensions
	R23 WH	White	<ul style="list-style-type: none"> Joins two track sections end to end 	
	R23 BL	Black		
	R23 SL	Silver		
	R23 BZ	Bronze		
 Flexible Adjustable Joiner	Catalog #	Finish	Description	Dimensions
	R20 WH	White	<ul style="list-style-type: none"> Joins two track sections Can flex to 90° to the left, right, up or down 	
	R20 BL	Black		
	R20 SL	Silver		
	R20 BZ	Bronze		
 Adjustable Connector	Catalog #	Finish	Description	Dimensions
	R24 WH	White	<ul style="list-style-type: none"> Joins two track sections to make a 90° angle or straight run T27 required for junction box feed Straight and right angle covers supplied 	
	R24 BL	Black		
	R24 SL	Silver		
	R24 BZ	Bronze		
 "T" Connector	Catalog #	Finish	Description	Dimensions
	R25 WH	White	<ul style="list-style-type: none"> Joins three track sections T27 required for junction box feed 	
	R25 BL	Black		
	R25 SL	Silver		
	R25 BZ	Bronze		
	R25 RP WH	White	<ul style="list-style-type: none"> Same as above except designed for use in opposite polarity orientation compared to standard connectors See specification sheets for more details 	
	R25 RP BL	Black		
	R25 RP SL	Silver		
	R25 RP BZ	Bronze		
 Outlet Box Cover	Catalog #	Finish	Description	Dimensions
	T27 WH	White	<ul style="list-style-type: none"> Use with R24 and R25 for outlet box electrical feed Includes nipple, locknut, and ground screw 	
	T27 BL	Black		
	T27 SL	Silver		
	T27 BZ	Bronze		
 Track Continuation Kit	Catalog #	Finish	Description	Dimensions
	R49 WH	White	<ul style="list-style-type: none"> Two conduit adapters (one left R34 and one right R34) to continue track run around or thru obstructions Use with standard 1/2" electrical connectors 	
	R49 BL	Black		
	R49 SL	Silver		
	R49 BZ	Bronze		

Current Limiting Feeds & Circuit Breakers

Current Limiting Feeds


	Catalog #	Finish	Track Type	Description	Dimensions
 <p>Mini End Feed</p>	RCLFM11 WH	White	1-Circuit	Mini End Feed	
	RCLFM11 BL	Black			
	RCLFM11 SL	Silver			
	RCLFM11 BZ	Bronze			
	RCLFM11 RP WH	White	1-Circuit	Same as above except designed for use in opposite polarity orientation compared to standard feeds – see specification sheets for more details	
	RCLFM11 RP BL	Black			
	RCLFM11 RP SL	Silver			
	RCLFM11 RP BZ	Bronze			

	Catalog #	Finish	Track Type	Description	Dimensions
 <p>End Feed</p>	RCLF11 RP WH	White	1-Circuit	End Feed	
	RCLF11 RP BL	Black			

	Catalog #	Finish	Track Type	Description	Dimensions
 <p>In-Line Feed</p>	RCLF21 RP WH	White	1-Circuit	In-Line Feed	
	RCLF21 RP BL	Black			

Current Limiting Circuit Breakers - Order Separately

Example: **RCLF11 BL** and **TCLCB 5A BLCK**

	Catalog # Dimensions	Descriptions	Wattage	Finish
	TCLCB 0.5A	0.5A Current Limiting Circuit Breaker	60W	WHT, BLCK
	TCLCB 1A	1A Current Limiting Circuit Breaker	120W	WHT, BLCK
	TCLCB 2A	2A Current Limiting Circuit Breaker	240W	WHT, BLCK
	TCLCB 3A	3A Current Limiting Circuit Breaker	360W	WHT, BLCK
	TCLCB 4A	4A Current Limiting Circuit Breaker	480W	WHT, BLCK
	TCLCB 5A	5A Current Limiting Circuit Breaker	600W	WHT, BLCK
	TCLCB 6A	6A Current Limiting Circuit Breaker	720W	WHT, BLCK
	TCLCB 7A	7A Current Limiting Circuit Breaker	840W	WHT, BLCK
	TCLCB 8A	8A Current Limiting Circuit Breaker	960W	WHT, BLCK
	TCLCB 10A	10A Current Limiting Circuit Breaker	1200W	WHT, BLCK
	TCLCB 12A	12A Current Limiting Circuit Breaker	1440W	WHT, BLCK
	TCLCB 14A	14A Current Limiting Circuit Breaker	1680W	WHT, BLCK

Current Limiting Feeds & Subpanels

Current Limiting Pendant Stem Kits

Current Limiting Pendant Stem Kits combine the functionality of pendant mounting with the ability to feed the track with current limiting in an attractive, integrated solution.




T-Bar Ceiling Mount

Catalog #	Finish
T90CLF 12IN BL	Black
T90CLF 12IN SL	Silver
T90CLF 12IN WH	White
T90CLF 18IN BL	Black
T90CLF 18IN SL	Silver
T90CLF 18IN WH	White
T90CLF 24IN BL	Black
T90CLF 24IN SL	Silver
T90CLF 24IN WH	White
T90CLF 36IN BL	Black
T90CLF 36IN SL	Silver
T90CLF 36IN WH	White
T90CLF 48IN BL	Black
T90CLF 48IN SL	Silver
T90CLF 48IN WH	White

Description

- Compatible with 15/16" flush T-bar ceilings
- 12", 18", 24", 36", 48" stem lengths
- Includes mounting plate, canopy, stem and wireway cover (order R38 track feed connector and current limiting circuit breaker separately – see page 115)

Dimensions

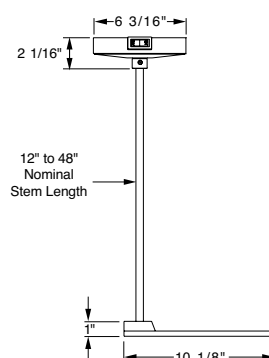


Rigid Ceiling Mount

Catalog #	Finish
T91CLF 12IN BL	Black
T91CLF 12IN SL	Silver
T91CLF 12IN WH	White
T91CLF 18IN BL	Black
T91CLF 18IN SL	Silver
T91CLF 12IN WH	White
T91CLF 24IN BL	Black
T91CLF 24IN SL	Silver
T91CLF 24IN WH	White
T91CLF 36IN BL	Black
T91CLF 36IN SL	Silver
T91CLF 36IN WH	White
T91CLF 48IN BL	Black
T91CLF 48IN SL	Silver
T91CLF 48IN WH	White

Description

- Compatible with 15/16" flush T-bar ceilings
- 12", 18", 24", 36", 48" stem lengths
- Includes mounting plate, canopy, stem and wireway cover (order R38 track feed connector and current limiting circuit breaker separately – see page 115)

Dimensions

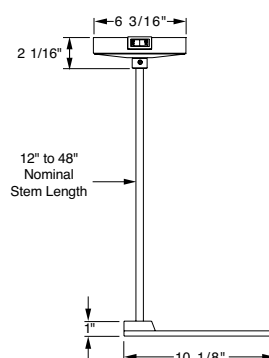

Current Limiting Subpanel

The SilverBullet is a "sub-branch circuit current limiter" for track lighting that enforces a definite current limit to lower the VA rating of each track lighting circuit and meet code requirements. Use of a current limiting subpanel is often a more cost-effective method of employing current limiting, especially for applications with more than 10 circuits to limit.

See page 90 for more details.





Mounting Accessories

Pendant Stem Kits

Pendant Stem kits enable the track to be mounted at ideal heights, without having to lower the entire ceiling plane. Stems can be specified in a variety of different lengths and can be joined for higher ceiling applications.

	Catalog #	Finish	Description	Dimensions
	T90 12IN WH	White	<ul style="list-style-type: none"> Compatible with 15/16" flush T-bar ceilings 12", 18", 24", 36", 48" stem lengths Use two for 2', 4', or 6' track, or three for 8' track For electrical feed, order Wireway Cover T93 and R38 	
	T90 12IN BL	Black		
	T90 12IN SL	Silver		
	T90 12IN BZ	Bronze		
	T90 18IN WH	White		
	T90 18IN BL	Black		
	T90 18IN SL	Silver		
	T90 18IN BZ	Bronze		
	T90 24IN WH	White		
	T90 24IN BL	Black		
	T90 24IN SL	Silver		
	T90 24IN BZ	Bronze		
	T90 36IN WH	White		
	T90 36IN BL	Black		
	T90 36IN SL	Silver		
	T90 36IN BZ	Bronze		
	T90 48IN WH	White		
	T90 48IN BL	Black		
	T90 48IN SL	Silver		
	T90 48IN BZ	Bronze		

	Catalog #	Finish	Description	Dimensions
	T91 12IN WH	White	<ul style="list-style-type: none"> Compatible with rigid ceilings 12", 18", 24", 26", 48" stem lengths Use two for 2', 4', or 6' track, or three for 8' track For electrical feed, order Wireway Cover T93 and R38 	
	T91 12IN BL	Black		
	T91 12IN SL	Silver		
	T91 12IN BZ	Bronze		
	T91 18IN WH	White		
	T91 18IN BL	Black		
	T91 18IN SL	Silver		
	T91 18IN BZ	Bronze		
	T91 24IN WH	White		
	T91 24IN BL	Black		
	T91 24IN SL	Silver		
	T91 24IN BZ	Bronze		
	T91 36IN WH	White		
	T91 36IN BL	Black		
	T91 36IN SL	Silver		
	T91 36IN BZ	Bronze		
	T91 48IN WH	White		
	T91 48IN BL	Black		
	T91 48IN SL	Silver		
	T91 48IN BZ	Bronze		



	Catalog #	Finish	Description	Dimensions
	T93 WH	White	<ul style="list-style-type: none"> Use one for each T90 or T91 when using stem for feeding track Feed at R38 or R24 Conceals electrical feed wires from stem to track 	
	T93 BL	Black		
	T93 SL	Silver		
	T93 BZ	Bronze		

Pendant Stem Kits



Mounting Accessories (cont)

Pendant Stem kits enable the track to be mounted at ideal heights, without having to lower the entire ceiling plane. Stems can be specified in a variety of different lengths and can be joined for higher ceiling applications.



Pendant Stem Support Kits

	Catalog #	Finish	Description	Dimensions
	T9091M 12IN WH	White	• For mechanical support only (no feed)	
	T9091M 12IN BL	Black	• Suspends track from T-bar or rigid ceilings	
	T9091M 12IN SL	Silver	• Offers simpler installation and a smaller ceiling footprint	
	T9091M 18IN WH	White	• 12", 18", 24", 36", 48" stem lengths	
	T9091M 18IN BL	Black	• Use two for 2', 4', or 6' of track or three for 8' and four for 12' of track	
	T9091M 18IN SL	Silver	• Includes Mini-Canopy, pendant stem, 1-5/16" T-bar clip, drywall anchor and track mounting hardware	
	T9091M 24IN WH	White		
	T9091M 24IN BL	Black		
	T9091M 24IN SL	Silver		
	T9091M 36IN WH	White		
	T9091M 36IN BL	Black		
	T9091M 36IN SL	Silver		
	T9091M 48IN WH	White		
	T9091M 48IN BL	Black		
	T9091M 48IN SL	Silver		

Pendant Stem Mechanical Support Kit

	Catalog #	Finish	Description	
	T96 WH	White	• Enables multiple pendant stems to be joined for higher ceiling applications	
	T96 BL	Black		
	T96 SL	Silver		
	T96 BZ	Bronze		


Pendant Stem Threaded Coupling

	Catalog #	Finish	Description	
	T94 WH	White	• Permits pendant track stem to be hung vertically from sloped ceiling	
	T94 BL	Black	• Use pendant kits (T90, T91)	
	T94 SL	Silver	• Will allow feeding of electrical wires to track at up to a 60° angle	
	T94 BZ	Bronze		

Pendant Slope Ceiling Adapter


Mounting Accessories


Cable Suspension Kit



T-Bar/Rigid Ceiling Cable Suspension Kit


Catalog #	Finish	Description
T595 48IN WH	White	<ul style="list-style-type: none">Mechanical-only cable suspension kit for one-circuit or two-circuit trackAdjustable 48" or 144" cableFor use on 15/16" T-bar ceiling
T595 48IN BL	Black	
T595 144IN WH	White	
T595 144IN BL	Black	






T-Bar/Rigid Ceiling Cable Suspension/Feed Kit

Catalog #	Finish	Description
T596 48IN WH	White	<ul style="list-style-type: none">Cable suspension kit with 48" or 144" electrical feed for one-circuit trackFor use on 15/16" T-bar ceiling
T596 48IN BL	Black	
T596 144IN WH	White	
T596 144IN BL	Black	









T-Bar/Rigid Ceiling Cable Suspension/Feed Kit

T598 48IN WH	White	<ul style="list-style-type: none">Cable suspension kit with 48" or 144" electrical feed for one-circuit trackFor use on rigid ceiling
T598 48IN BL	Black	
T598 144IN WH	White	
T598 144IN BL	Black	

Mounting Accessories









	Catalog # R37F R37D R37916	Description <ul style="list-style-type: none">• To attach track to inverted tee ceiling• Use two for 2' or 4' track or three for 6' or 8' track• R37F T-Bar Clip is compatible with flush tile 15/16" inverted T-bar ceiling• R37D T-Bar Clip is compatible with drop tile 15/16" inverted T-bar ceiling• R37916 T-Bar Clip is compatible with drop tile or flush tile 9/16" inverted T-Bar ceiling		
T-Bar Attachment Clip				

	Catalog # T56 WH T56 BL T56 SL T56 BZ	Finish White Black Silver Bronze	Description <ul style="list-style-type: none">• Attaches solid 5/16" threaded rod to track• Includes plastic cap, mounting bracket, and hardware• Rod not supplied	
Solid Rod Pendant Mounting Kit				

	Catalog # T95 WH T95 BL	Finish White Black	Description <ul style="list-style-type: none">• Attaches to track, permitting Juno Trac-Master and Trac-Lites fixtures using the standard square Super Adapter to be hung vertically from sloped ceiling• 90° maximum adjustment	Dimensions 
Slope Ceiling Fixture Adapter				

Mounting Accessories

Mounting Accessories (cont)

 <p>Monopoint - Line Voltage</p>	Catalog # R40N WH R40N BL R40N BZ R40N SL	Finish White Black Bronze Silver	Description <ul style="list-style-type: none"> • Accepts Juno Trac-Master & Trac-Lites 120V track • Mounts directly to outlet box 	Dimensions 
 <p>Line Voltage Monopoint-Flush Mount</p>	Catalog # T40F WH T40F BL	Finish White Black	Description <ul style="list-style-type: none"> • Mounts directly to 4" outlet box only • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures using the standard square Super Adapter 	Dimensions 
 <p>Line Voltage Duopoint</p>	Catalog # T41N WH T41N BL	Finish White Black	Description <ul style="list-style-type: none"> • Mounts directly to outlet box • Accepts two Juno Trac-Master or Trac-Lites 120V track fixtures 	Dimensions 
 <p>Weighted Base</p>	Catalog # T42N WH T42N BL	Finish White Black	Description <ul style="list-style-type: none"> • Heavy base enables track fixture to be placed on a horizontal surface (i.e. floor, shelf) and aimed upwards • Accepts Juno Trac-Master & Trac-Lites 120V track fixtures • Supplied with 8' cord and plug for portable use 	Dimensions 

Extension Wands & Special Mounting Accessories

Line Voltage Extension Wands

Extension wands suspend fixtures precisely where they are needed without lowering the track section. On/Off switch is standard. Line voltage extension wands suspend all Juno line voltage track fixtures from all 120V Juno Trac. Two extension wand types are available: one designed for use with the standard square Super Adapter found on most Trac-Master and Trac-Lites fixtures and one designed for use with the wide adapter found on some track fixtures such as T255L, T265L and T267L. Always confirm the fixture adapter type before specifying an extension wand to ensure compatibility. May also be used with Monopoints designed to accept Juno 120V track fixtures. Constructed of 1/2" rigid tubular steel and Lexan® plastic.



Line Voltage

Line Voltage Extension Wands		
Super Adapter Catalog #	Finish	Overall Length
TEW 12IN WH	White	13 1/2"
TEW 12IN BL	Black	
TEW 18IN WH	White	
TEW 18IN BL	Black	19 1/2"
TEW 18IN SL	Silver	
TEW 24IN WH	White	25 1/2"
TEW 24IN BL	Black	
TEW 24IN SL	Silver	
TEW 36IN WH	White	37 1/2"
TEW 36IN BL	Black	
TEW 48IN WH	White	49 1/2"
TEW 48IN BL	Black	
TEWS WH*	White	28 1/2"
TEWS BL*	Black	

* 24IN wand with slope adapter on top.

Miscellaneous Track Accessories




Pendant Adapter

Catalog #	Finish
T31N WH	White
T31N BL	Black
T31N SL	Silver

Description

- Adapts swag or chain-hung fixture to track
- Includes strain relief for 3-wire cord (replaces chain loop)
- Chain installation accepts wire diameters up to 0.270" and supports up to 15 lbs.; strain relief installation requires Type SVT 18/3 3-wire cord and supports up to 5 pounds.
- UL Listed
- 5A max

Dimensions



Note: T31N is available with GTYPE, HTYPE and LTYPE Alternate Mounting Adapters – see specification sheet for details.




Planter or Utility Hook

Catalog #	Finish
T32 WH	White
T32 BL	Black

Description

- Supports up to 25 lbs.
- Not UL Listed

Dimensions




Outlet Adapter

Catalog #	Finish
T33 WH	White
T33 BL	Black
T33 SL	Silver

Description

- Provides electrical receptacle
- Not UL Listed
- 7A max

Dimensions



Coil Cord Calmp-Ons & Outrigger Mounting Bracket

Coil Cord Clamp-Ons with Monopoint

Coil cord clamp-ons provide an innovative way to mount fixtures to pipe and flat surfaces up to 1 1/2" thick. Designed with futuristic styling in mind for dynamic displays and special mounting situations.



Track Line Voltage Coil Cord Clamp-On

Super Adapter Catalog

T132 WH
T132 BL


Finish

White
Black

Description

- Attaches to Juno 120V Trac-Master & Trac-Lites 120V and Monopoints
- Accepts Juno Trac-Master & Trac-Lites 120V track (confirm fixture adapter type before specifying to ensure compatibility)
- Includes On/Off switch
- 2' coil cord extends to 5'

Dimensions



Plug-In Line Voltage Coil Cord Clamp-On

Super Adapter Catalog

T133 WH
T133 BL


Finish

White
Black

Description

- With coil cord and male plug (for standard 120V receptacle)
- Accepts Juno Trac-Master & Trac-Lites 120V track fixtures (confirm fixture adapter type before specifying to ensure compatibility)
- Includes On/Off switch
- 2' coil cord extends to 5'

Dimensions



Outrigger Track Mounting Bracket (non-electrified)



Outrigger Track Mounting Bracket

Catalog

T47 WH
T47 BL

Finish

White
Black

Description

- For mounting track out from wall
- Use two for 2', 4' or 6' track sections, three for 8' sections, four for 12' sections
- Order track and track connectors separately
- For portable electric feed, use R22 or R122 Cord Set
- For permanent wiring, use R38 Live End Feed

Dimensions

24"L x 8"H

Track Kits



Track Kits

Packed to go. The most popular models supplied in simple-to-install pre-packaged kits.

Line Voltage Conical LED Track Kits



Description

- Kit includes three (3) universal beam R600L 10W LED track fixtures, one 4' Trac-Lites track section, one floating electrical feed and mounting hardware.
- Kits are available in all R600L CCTs, CRIs and finishes to suit any retail, commercial or residential application.

Ordering Information			Ordering Example: R4K3600L 27K 90CRI PDIM UNF BZ		
Series	Color Temperature	Color Rendering Index	Dimming Compatibility	Distribution	Finish
R4K3600L Trac-Lites R600L Trac Kit	27K 2700K	80CRI 80 CRI	PDIM Phase Dimmable	UNF Universal - Narrow Flood, Flood	BL Black
	30K 3000K	90CRI 90 CRI			SL Silver
	35K 3500K	97CRI¹ 97 CRI			WH White
	40K 4000K				

¹ Special order - may have extended lead-times or order minimums; not available in 35K.





Juno® Trac-Lites™

Juno Trac-Lites bring you all the style, quality and lighting performance Juno is famous for at affordable prices that can be tailored to any budget.

Juno Trac-Lites offer a total system, featuring a wide assortment of low voltage and line voltage track fixtures, system components and track kits. Track fixtures are available in all the popular classics and in exciting contemporary designs, from flares and open backs to cylinders, bells, and cubes.

For added versatility, all Trac-Lites fixtures are compatible with Juno Trac-Master™ Trac systems and all Juno Trac-Master fixtures may be used on Trac-Lites Trac systems.





Juno[®] Trac-Lites[™] System



©2019 Acuity Brands Lighting, Inc. The marks appearing in this catalog are trademarks of Acuity Brands Lighting, Inc. Products shown in this brochure may be covered by U.S. and international patents and patents pending. Specifications subject to change without notice. Printed in the U.S.A.