



# TRAC-MASTER®

Avant Garde

## MAMBA® SERIES

### T860, T863 and T868

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

#### PRODUCT DESCRIPTION

Mamba is a strikingly original, front loading gimbal-ring design. Its gracefully curved and tapered elements flow into a gimbal ring that appears to float, while the gently scooped socket housing reinforces a concave/convex theme. Concealed wiring and sleek trac adapter create an ultra-clean appearance.

Mamba uses high-quality, die-cast aluminum construction and is available in attractive white, black and silver finishes.



#### Low Voltage MR16

**Construction** Die cast aluminum housing.

**Lamp** 12V, 50W maximum MR16 GU5.3/GX5.3 bi-pin • Halogen lamps must be MR16CG type with integral lens (cover glass).


**Socket** Ceramic bi-pin.

**Transformer** Must be ordered separately • Compatible with T537 or T538 12V electronic transformer for halogen lamps (D1.2.1) • Compatible with T537 LED universal 12V electronic transformer for LED or halogen lamps (D1.2.5) • Compatible with T539 12V electronic transformer for halogen lamps (D1.2.0) • Compatible with T543 12V magnetic transformer for LED or halogen lamps (D1.2.0).

**Labels** UL and C-UL Listed.

Specifications subject to change without notice.

Catalog Number	Finish	Lamp
T860 WH	White	50W MR16 max. (halogen must use MR16CG type)
T860 BL	Black	50W MR16 max. (halogen must use MR16CG type)
T860 SL	Silver	50W MR16 max. (halogen must use MR16CG type)

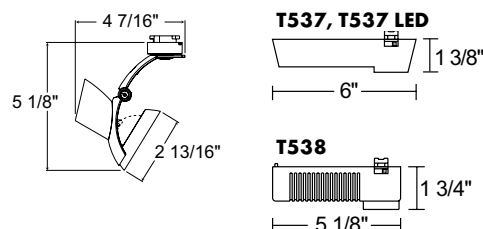

#### Line Voltage PAR30

**Construction** Die cast aluminum housing.

**Lamp** 120V, 75W maximum PAR30 medium base.

**Socket** Medium base porcelain with nickel plated copper screw shell.

**Juno Universal Trac Adapter** Compatible with Juno Trac-Master 1 or 2-circuit systems or Juno Trac-Lites system • Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.


**Alternate TEK Trac Adapter** Compatible with Juno TEK trac system • System specific and assembled to trac fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing.

**Aiming** 360° horizontal rotation • 90° vertical aiming capability.

**Labels** UL and C-UL Listed.

Specifications subject to change without notice.

Catalog Number	Description	Finish	Lamp
T863 WH	Mamba w/Universal Trac Adapter	White	75W PAR30 max.
T863 BL	Mamba w/Universal Trac Adapter	Black	75W PAR30 max.
T863 SL	Mamba w/Universal Trac Adapter	Silver	75W PAR30 max.
T863 TEK WH	Mamba w/TEK Trac Adapter	White	75W PAR30 max.
T863 TEK BL	Mamba w/TEK Trac Adapter	Black	75W PAR30 max.
T863 TEK SL	Mamba w/TEK Trac Adapter	Silver	75W PAR30 max.

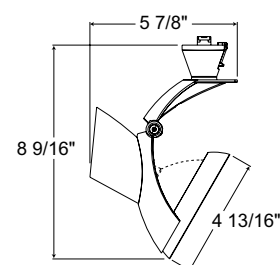


**TRAC-MASTER®**

Avant Garde

**MAMBA® SERIES****T860, T863 and T868****Line Voltage PAR38****Construction** Die cast aluminum housing.**Lamp** 120V, 150W maximum PAR38 medium base.**Socket** Medium base porcelain with nickel plated copper screw shell.**Juno Universal Trac Adapter** Compatible with Juno Trac-Master 1 or 2-circuit systems or Juno Trac-Lites system • Unique, attractive conical-elliptical shaped trac adapter • Copper alloy contacts provide precise spring action – no arcing and will not take a set • True, positive electrical ground • Spring-loaded positive latch with embossed polarity arrow secures trac light to trac • “Pull-up” contact to up position for two-circuit application • Polarity indicator embossed on copper contact.**Alternate TEK Trac Adapter** Compatible with Juno TEK trac system • System specific and assembled to trac fixture • Integrally polarized construction to prevent reverse installation – only allows insertion in proper orientation • Rotary circuit selector enables simple switching between circuits • Integral on/off switch enables individual fixtures to be switched for servicing.**Aiming** 360° horizontal rotation • 90° vertical aiming capability.**Labels** UL and C-UL Listed.

Specifications subject to change without notice.

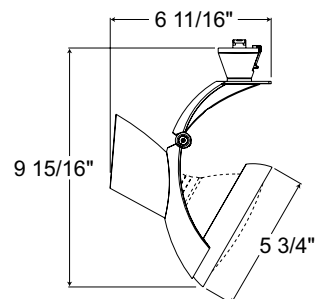

Catalog Number	Description	Finish	Lamp
<b>T868 WH</b>	Mamba w/Universal Trac Adapter	White	150W PAR38 max.
<b>T868 BL</b>	Mamba w/Universal Trac Adapter	Black	150W PAR38 max.
<b>T868 SL</b>	Mamba w/Universal Trac Adapter	Silver	150W PAR38 max.
<b>T868 TEK WH</b>	Mamba w/TEK Trac Adapter	White	150W PAR38 max.
<b>T868 TEK BL</b>	Mamba w/TEK Trac Adapter	Black	150W PAR38 max.
<b>T868 TEK SL</b>	Mamba w/TEK Trac Adapter	Silver	150W PAR38 max.