



LBR Series


Retrofit & Remodel Downlight

- Switchable CCTs and lumens
- Aperture sizes including 4", 6", 8", and 10"
- Glare control with deep source regression
- Up to 114 LPW
- Available with battery pack, IOTA emergency transfer system (ETS), 347V step-down transformer and optional wet location (IP55) listed
- nLight® wired or wireless lighting controls and SensorSwitch™ JOT single room controls
- 10% and 1% dimming, MVOLT 120-277V, 0-10V and phase dimming in an all-in-one driver or a separate DALI driver



Make the Switch to LBR

Switchable CCTs & Lumens

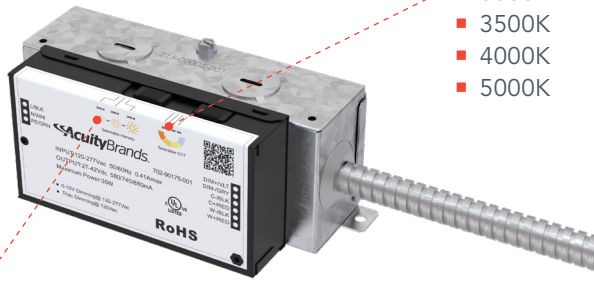


CCTs

- 3000K
- 3500K
- 4000K
- 5000K

Lumen Packages

- 500, 750, 1000LM
- 1000, 1500, 2000LM
- 2000, 2500, 3000LM
- 4000, 4500, 5000LM

Deep Source Regression

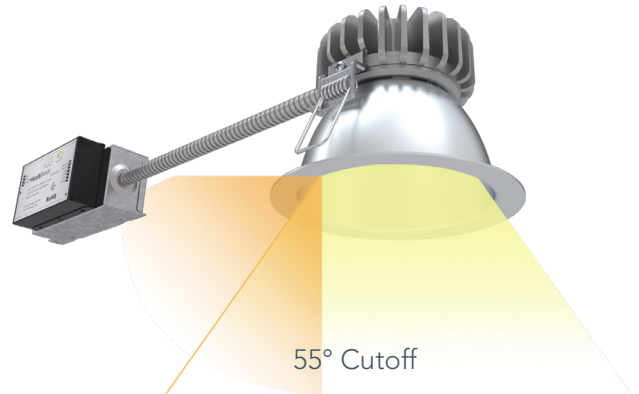

Options




Medium
Wide
1.0 S:MH


Wide
1.2 S:MH

Wallwash

Three distributions and square trims are available

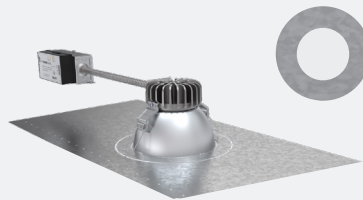

Smash plates and goof rings available for extra flexibility

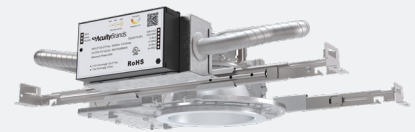

Available with new construction frame and quick disconnection options

Start Saving



Energy Savings

Reduce between 50-80% energy consumption compared to traditional sources



Low Labor Costs

Minimum install and cleanup time



Environmental Impact

Last up to 25 times longer than traditional sources



Lighting Controls

sensorswitch

SensorSwitch™ JOT is a wireless, app free solution for single room controls

nLIGHT

The nLight® platform offers wired or wireless networked lighting control solutions