



# WPX LED

Wall Pack Luminaires

## Architectural Looks at Distributor Stock Prices

The all-new Lithonia Lighting® WPX family of LED wall packs are your best choice for your everyday wall mounted lighting needs. No longer will your customers have to sacrifice performance and style in order to get the low initial cost that they demand.

With three sizes and lumen packages of 1,550 to 9,200 lumens, the WPX family is a site-wide solution, replacing up to 400W metal halide wall packs. Since the WPX footprints are larger than that of typical metal halide glass wall packs, they fully cover unsightly stains, resulting in a neat application without the need for additional patch and repair. Emergency egress battery, photocell, CCT and finish options make the WPX configurable to meet the needs of any application.



### Quick Facts:


- Three sizes deliver 1,550 to 9,200 lumens
- Replace up to 400W metal halide
- Photocell and battery pack options
- Available in 3000K, 4000K and 5000K
- DLC listed
- 5-year limited warranty



# WPX LED Wall Packs


## Benefits For Distributors & Contractors:

The WPX is a site-wide wall-mounted solution, from over-the-door lighting to perimeter lighting with mounting heights of up to 20 feet. The WPX wall packs deliver a wide photometric distribution that reduces the number of luminaires required while creating a well-illuminated, safer nighttime environment. The Lithonia Lighting® WPX is priced competitively and always in stock for quick delivery.

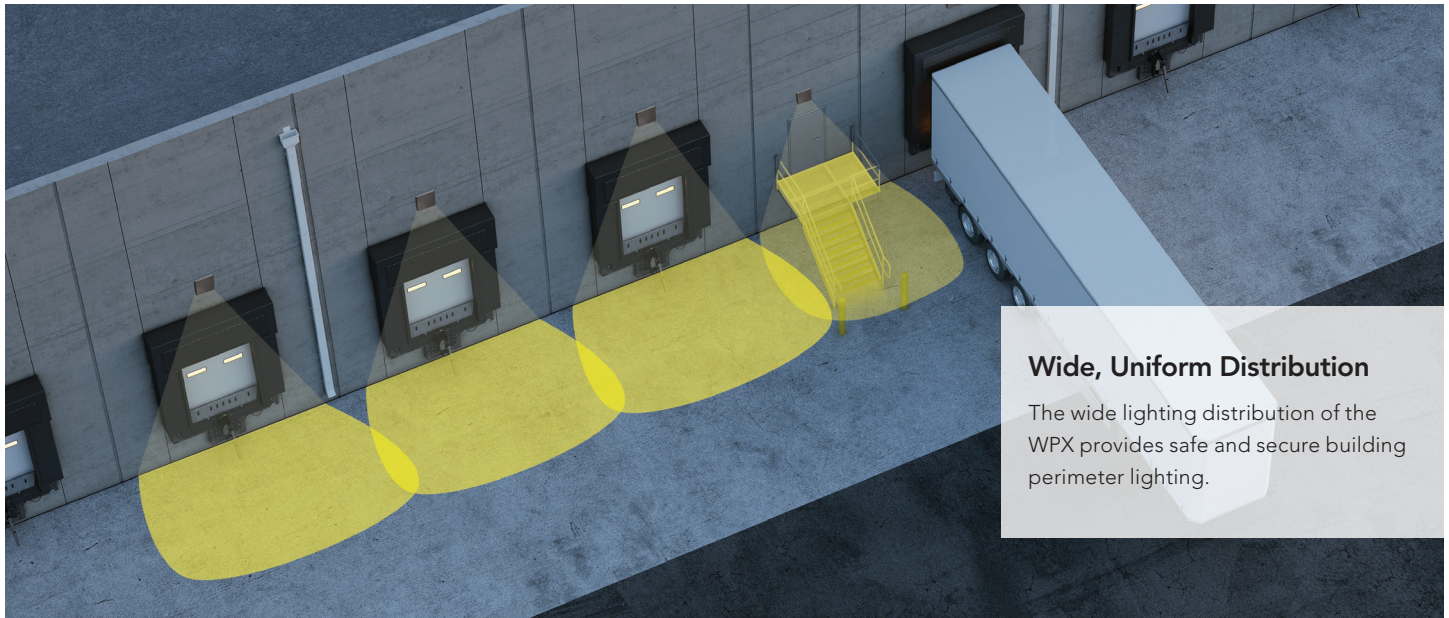

### Wide, Uniform Distribution


The wide lighting distribution of the WPX provides safe and secure building perimeter lighting.



Geometric shape covers the footprint of a typical HID wall pack, covering any unsightly stains.



1/2" threaded conduit hubs on three sides for surface conduit wiring making replacement and renovation easy.



Effortless installation with integral wiring compartment for easy mounting and wiring.

### WPX LED

Series & Lumen Output	Color Temperature	Voltage	Options	Finish
<b>WPX1 LED P1</b> <sup>1</sup> 1,550 Lumens, 11W	<b>30K</b> 3000K	<b>MVOLT</b> 120-277V	<b>(blank)</b> None	<b>DDBXD</b> Dark Bronze
<b>WPX1 LED P2</b> 2,900 Lumens, 24W	<b>40K</b> 4000K	<b>347</b> 347V <sup>3</sup>	<b>E4WH</b> Emergency battery backup, CEC compliant (4W, 0°C min) (available with WPX1 and WPX2) <sup>2</sup>	<b>DWHXD</b> White
<b>WPX2 LED</b> 6,000 Lumens, 47W	<b>50K</b> 5000K		<b>E14WC</b> Emergency battery backup, CEC compliant (14W, -20°C min) (available with WPX1 and WPX2) <sup>2</sup>	<b>DBLBXD</b> Black
<b>WPX3 LED</b> 9,200 Lumens, 69W			<b>PE</b> Photocell for dusk-to-dawn operation <sup>3</sup>	<i>Consult factory for other finish options</i>

Note: The lumen output and input power shown in the ordering tree are average representations of all configuration options. Specific values are available upon request.

1. All WPX wall packs come with 6kV surge protection standard, except WPX1 LED P1 package which comes with 2.5kV surge protection standard. Add SPD6KV option to get WPX1 LED P1 with 6kV surge protection.
2. 347V and PE options not offered with any battery pack options. WPX3 is not available with any battery options.
3. Battery pack options not available with 347V and PE options.

Visit [www.lithonia.com](http://www.lithonia.com) for more information.