

FEATURES & SPECIFICATIONS

INTENDED USE

The LED Décor round provides an attractive, low-cost, and energy-efficient lighting solution in residential and light commercial applications. Ideal for use in foyers, hallways, bedrooms, closets, offices, utility work areas, stairways and many other areas.

CONSTRUCTION

Deco-styled fixture with choice of brushed nickel or bronze housing and matching decorative center finial. Softly rounded, molded, white glass diffuser for a widespread, uniform illumination. Center finial provides easy access for cleaning and maintenance.

OPTICS

The 10" produces 960 lumens (3000K), the 14" 1570 lumens at 30,000 hours of life.

ELECTRICAL

Fixture operates at 120 volts, 60Hz. Standard input = 10": 20 watts, 48 lumens per watt; 14": 30 watts, 52 lumens per watt.

Actual wattage may differ by +/- 5% when operating at 120V +/- 10%.

Works with most standard incandescent dimmers (see list of suggested dimmers).

INSTALLATION

All mounting hardware included.

LISTINGS

UL Certified to US and Canadian safety standards and listed suitable for damp locations.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

Decorative Indoor

LED Décor Round Flush Mount




ESSENTIALS COLLECTION



	Specifications	
	10"	14"
(A) Width:	9.6 (24.3)	14.1 (35.7)
(B) Extension*:	3.9 (9.8)	5.25 (13.3)
Weight:	2 lbs (.9 kg)	3.5 lbs (1.6 kg)

* Extension from ceiling.
All dimensions are inches (centimeters)
unless otherwise indicated.

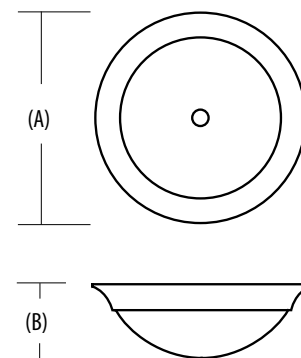

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMDECL 10 14830 BN

Series	Module/CRI	Color Temperature	Finish
FMDECL 10 10" Flush mount LED Decor	148 > 80 CRI	40 4000K 30 3000K	BN Brushed nickel BZ Bronze
FMDECL 14 14" Flush mount LED Decor	208 > 80 CRI		

LED Decor Flush Mount

LIGHTING FACTS

LITHONIA LIGHTING

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

958

Watts

20

Lumens per Watt (Efficacy)

47.9

Color Accuracy

Color Rendering Index (CRI)

80

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-LGT0EG (11/21/2014)

Model Number: FMDECL 10 14830

Type: Luminaire - Decorative

LITHONIA LIGHTING

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

980

Watts

20.08

Lumens per Watt (Efficacy)

48.8

Color Accuracy

Color Rendering Index (CRI)

80

Light Color

Correlated Color Temperature (CCT)

4000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-PUS2VL (11/21/2014)

Model Number: FMDECL 10 14840

Type: Luminaire - Decorative

LITHONIA LIGHTING

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

1569

Watts

30

Lumens per Watt (Efficacy)

52.3

Color Accuracy

Color Rendering Index (CRI)

80

Light Color

Correlated Color Temperature (CCT)

3000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: NJSM-LCARLW (11/21/2014)

Model Number: FMDECL 14 20830

Type: Luminaire - Decorative

LITHONIA LIGHTING

LED

lighting facts®

A Program of the U.S. DOE

Light Output (Lumens)

1465

Watts

30

Lumens per Watt (Efficacy)

48.83

Color Accuracy

Color Rendering Index (CRI)

80

Light Color

Correlated Color Temperature (CCT)

4000 (Bright White)

2700K

3000K

4500K

6500K

Warm White

Bright White

Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.


Registration Number: NJSM-S9HLBA (11/21/2014)

Model Number: FMDECL 14 20840

Type: Luminaire - Decorative

PHOTOMETRICS

FMDECL 10 14830 BZ, 958.76 delivered lumens, test no. LTL 26568S tested in accordance to IESNA LM-79.

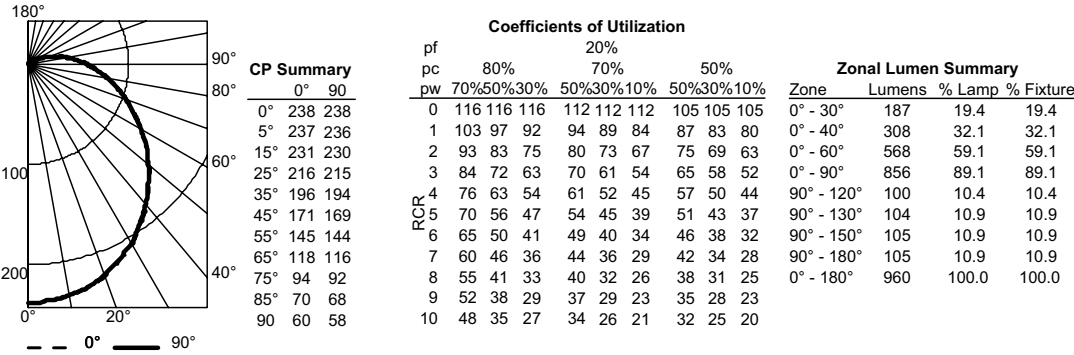

SUGGESTED DIMMERS		
The Decor is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.	Manufacturer	Part number(s)
	Lutron	CT-600P/CT-603P
		DV-600P/DV-603P
		CTCL-153P
		DVCL-153P
		AYCL-153P
		DVELV-300P
	Leviton	R50-IPL06
		6615-P
	Pass & Seymour	HCL453PTCCCV6